Cod. 1.039975 - Rev. ST.002778/002

IE

KIT CONTAINING BOTTOM GUARD FOR CONDENSING BOILERS CODE 3.027341

GENERAL WARNINGS.

All Immergas products are protected with suitable transport packaging.
The material must be stored in a dry place protected from the weather.
This instruction manual provides technical information for installing the Immergas kit. As for the other issues related to kit installation (e.g. safety in the workplace, environmental protection, accident prevention), it is necessary to comply with the provisions specified in the regulations in force and with the principles of good practice.
Improper installation or assembly of the Immergas appliance and/or components, accessories, kits and devices can cause unexpected problems for people, animals and objects. Read the instructions provided with the product carefully to ensure proper installation.
Installation and maintenance must be performed in compliance with the regulations in force, according to the manufacturer's instructions and by professionally qualified staff, meaning staff with specific technical skills in the plant sector, as envisioned by the law.

INSTALLATION.

Remove the bottom grid (if present) (pos. 1, Fig. 1) by unscrewing the two screws (pos. 2, Fig. 1).
Mount the bottom guard kit by assembling the right side (pos. 3, Fig. 1) and the left side (pos. 4, Fig. 1) to the front guard (pos. 5, Fig. 1) and screwing the screws (pos. 6, Fig. 1) into the prepared holes.

Note: for TT, Tera and Victrix Hybrid series boilers use the holes on the side guards (pos. 7, Fig. 1), for Victrix Exa series boilers use the holes (pos. 8, Fig. 1).

Attention: the side with central panel (pos. 3, Fig. 1) should always be mounted on the right side when standing in front of the boiler, as shown in Fig. 1.

Afterwards, fit the bottom guard kit to the boiler with the screws (pos. 9, Fig. 1) provided.

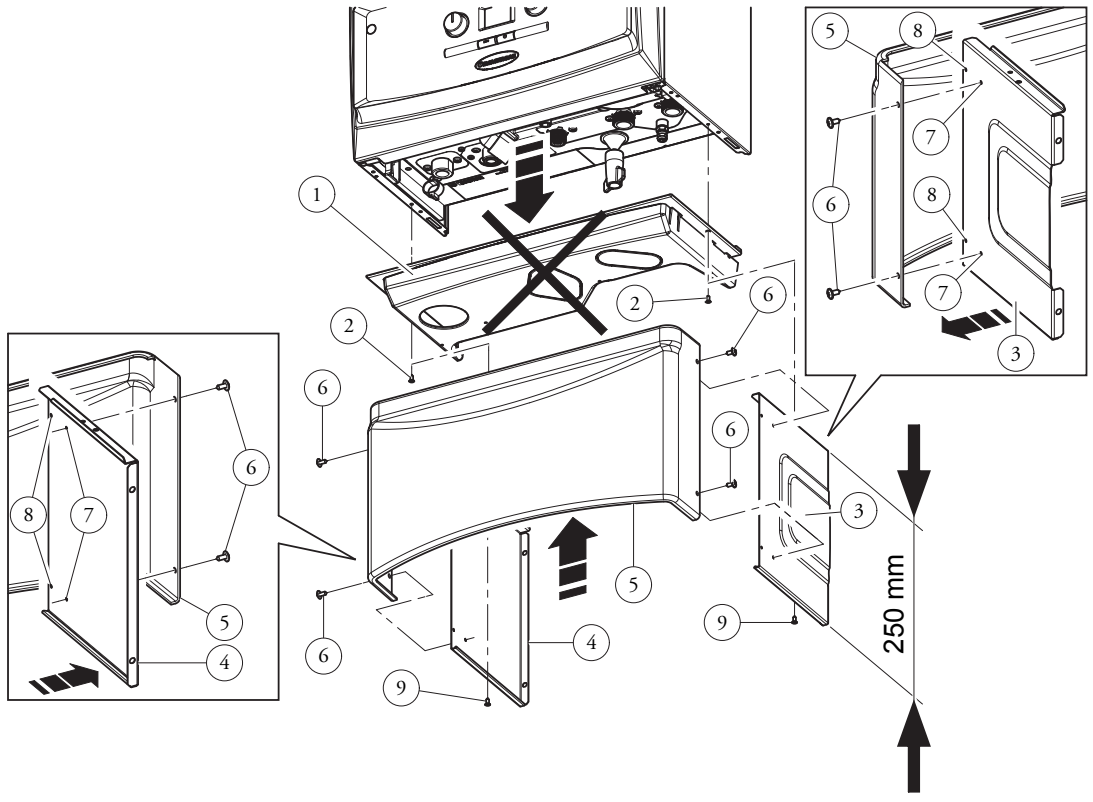


Fig. 1