Code 1.029141 Rev. ST.002692/002

VERTICAL CONNECTION KIT 1 OR 2 ZONE GAUDIUM SOLAR V2, TRIO V2, BASIC MAGIS PRO AND SOLAR CONTAINER COMBO

CODE 3.020575

IE


Kit installation.
Assemble the connection unit as shown in the figure, taking care to interpose the gaskets.

To prevent water from being able to infiltrate into the masonry, seal all the passages between the connection pipes and recessed frame.

N.B.: when installation is completed, check the hydraulic circuit by performing a leak test.

GAUDIUM SOLAR V2 - TRIO V2 - BASIC MAGIS PRO.


Kit composition		
Ref.	Description	Qty
1	Vertical central heating connection pipe	4
2	Vertical domestic hot water connection pipe	2
3	Insulation	4
4	Gasket 24x16x2	4
5	G 3/4" fitting	4
6	G 1/2" fitting	1
7	Gasket 18.5x11.5x2	2
8	G 1/2” ball valve	1
9	G 3/4" nut	4
10	G 1/2" nut	2

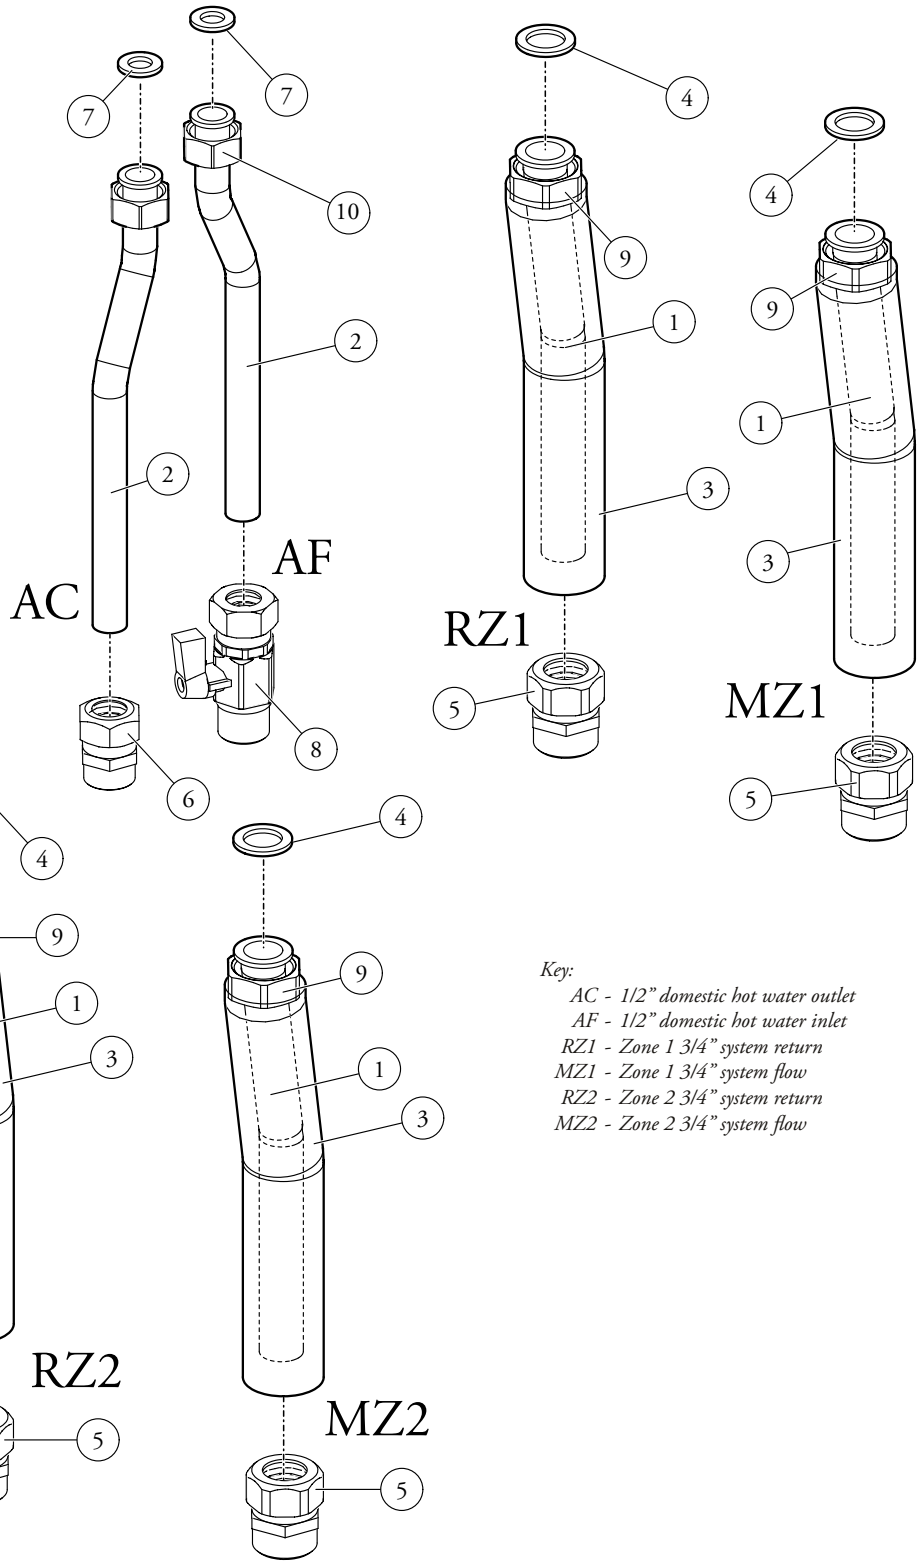

Key:
AC - 1/2” domestic hot water outlet
AF - 1/2” domestic hot water inlet
RZ1 - Zone 1 3/4” system return
MZ1 - Zone 1 3/4” system flow
RZ2 - Zone 2 3/4” system return
MZ2 - Zone 2 3/4” system flow

SOLAR CONTAINER COMBO.

Kit composition		
Ref.	Description	Qty
1	Vertical central heating connection pipe	4
2	Vertical domestic hot water connection pipe	2
3	Insulation	4
4	Gasket 24x16x2	4
5	G 3/4" fitting	4
6	G 1/2" fitting	1
7	Gasket 18.5x11.5x2	2
8	G 1/2” ball valve	1
9	G 3/4" nut	4
10	G 1/2" nut	2

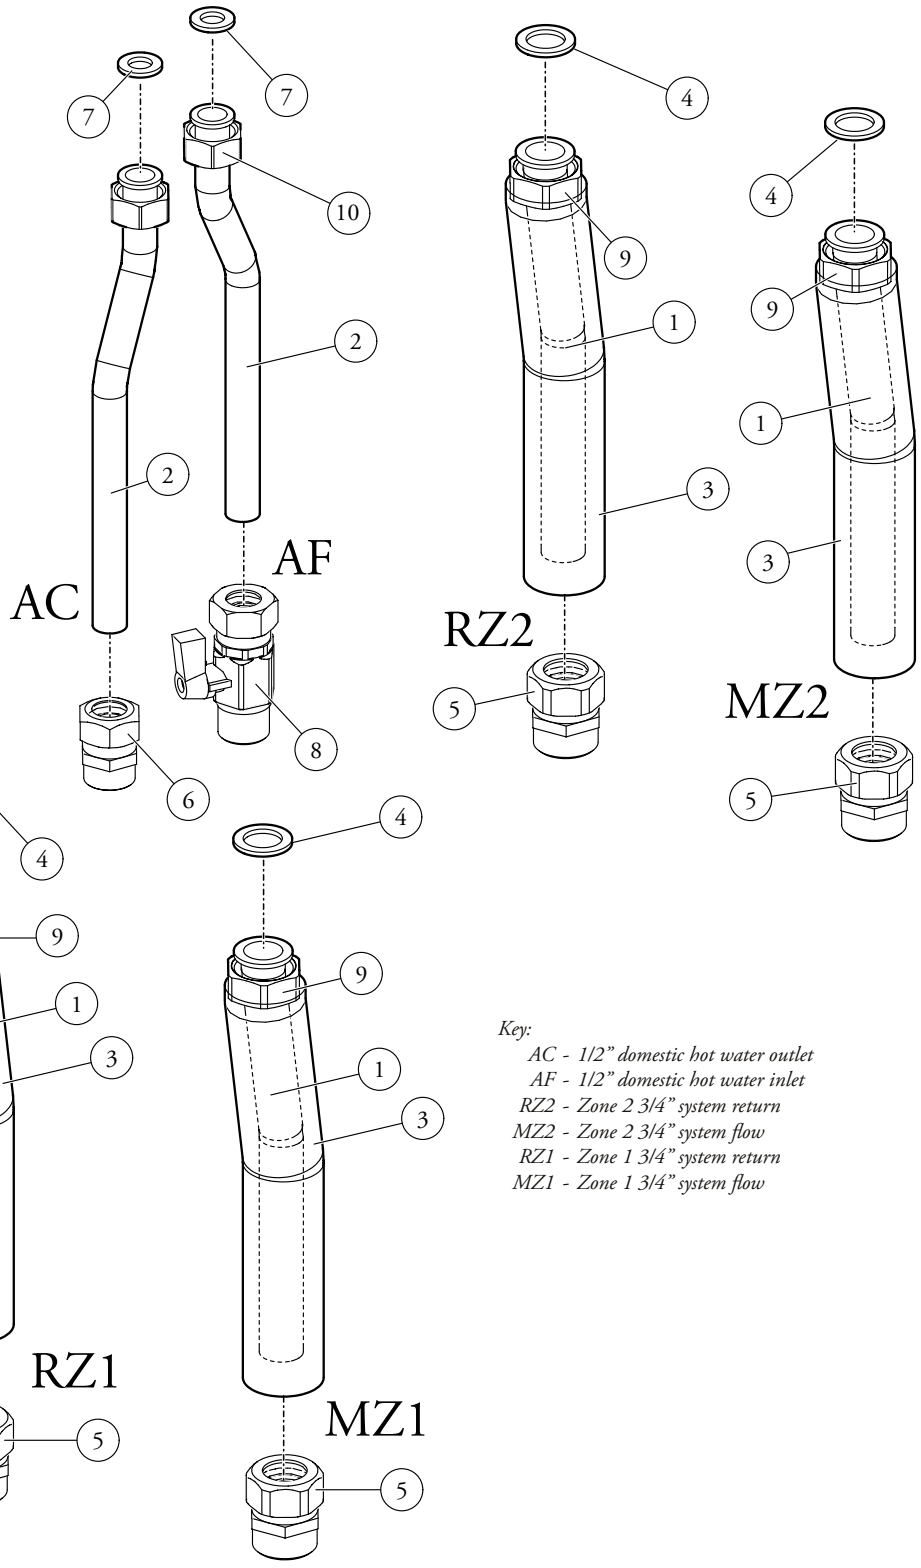

Key:
AC - 1/2” domestic hot water outlet
AF - 1/2” domestic hot water inlet
RZ2 - Zone 2 3/4” system return
MZ2 - Zone 2 3/4” system flow
RZ1 - Zone 1 3/4” system return
MZ1 - Zone 1 3/4” system flow